



## EV669

360° Ceiling Mount PIR, 18 Curtains, 10 m Radius, NC Relay, Alarm Memory

### 18 complete curtains of detection

The EV 669/666's 18 curtains offer maximum detection capability throughout the protected area including full undercrawl detection. Note that with the Aritech curtains, wherever an intruder intercepts a curtain, he is 100% seen by the detector and exactly fits the curtain width, thus collecting maximum infrared energy. Only with Aritech's Gliding Focus Mirror optics can the definition of the parallel curtains be achieved over the entire detection range. The special characteristics of a "curtain" provide not only better detection but also increased stability and rejection of false alarms from temperature changes on floors and carpets.

### Latest generation 4D signal processing

"4D" signal processing builds on the past success of the 3D processing. By expanding on the environmental filtering and extending the detection algorithms, this latest generation processing further improves on the capability to determine between valid intruders and false alarm signals. Always recognising the diverse applications that have to be protected, the EV 669/666 features both "4D" processing or Bi-curtain processing for the harsher environments. Designed specifically for use with the Gliding Focus Optics, the combination of mirror optics and ASIC technology provides you with complete peace of mind.

### 2 x Pyros, 2 x ASICs, 2 x Mirrors

In order to ensure the highest performance, the EV 669/666 incorporates 2 x pyros, 2 x ASICs, 2 x mirrors and 2 x the decision power providing the installer/user with 2 x the performance. The use of 2 separate pyros, mirrors and ASICs ensure that the detectors have an excellent signal to noise ratio. This means that you have better detection capability when you want it and better false alarm immunity when you need it.

### Detection coverage flexibility

The EV 669/666 provides considerable flexibility by the simple electronic field programming of either 180° or 360° coverage patterns. Further customisation, to allow for false alarm hazards such as heaters, machinery, etc., can be achieved through individual curtain masking enabling the installer to configure the detector to suit the application.



### Standard Features


- 360° coverage
- Full undercrawl detection
- 20 m range (diameter)
- 2 x pyros; 2 x mirrors; 2 x ASICs; 2 x performance
- 18 Unique gliding focus curtains
- Precision mirror optics
- Latest generation '4D' signal processing providing increased environmental stability with enhanced detection capability
- Electronic coverage pattern selection
- Alarm memory as standard
- Selectable control logic for alarm memory and walk test LED

# EV669

360° Ceiling Mount PIR, 18 Curtains, 10 m Radius, NC Relay, Alarm Memory

## Specifications

<b>Supply voltage</b>	8 - 15 VDC
	Max. ripple 2 V peak-to-peak at 12 VDC
<b>Current consumption</b>	
Normal operation	6 mA (EV 669)
In alarm, LED on	11 mA max.
<b>Outputs</b>	
Alarm	NC 100 mA at 28 VDC. Voltage free relay
Tamper	100 mA at 28 VDC
<b>Mounting height</b>	2.5 to 5.0 m
<b>Coverage</b>	10 m radius
<b>Ambient conditions</b>	-18 °C to +55 °C; Max 93% relative humidity
<b>IP/IK rating</b>	IP301
<b>Dimensions (Ø x H)</b>	138 x 66 mm

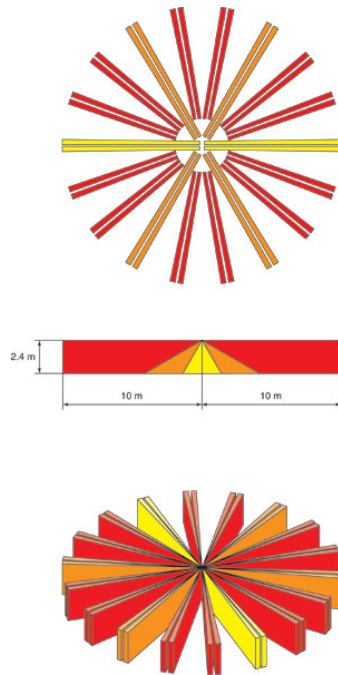

## Ordering Information

Part No.	Description
EV669	10 m radius Ceiling mounted PIR
ST400	Pry-off tamper kit



GE Security

[www.gesecurity.com](http://www.gesecurity.com)

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.