



AS263

Sounder, 26 tones - shallow base

Installer friendly

The AS 260 series feature a wide range of sounders tailored for every application: stand-alone or in combination with fire detectors. All types are compatible so that a synchronised phased start is guaranteed.

Flexible

Every sounder (except AS 266/267 and AS 263IS) is suitable for both 12 V dc and 24 V dc systems, and no adjustment is required. A 230V mains version is also available. Aesthetically pleasing, the AS 260 series features different sizes and red or white body colour.

Efficient and versatile

Every sounder provides high sound output at a low current consumption, thus reducing power standby requirements and system cost. The AS 263/4 comes with a volume control as standard, allowing final audio adjustments to be made during installation.

The AS 264/7 are weather resistant to IP 65, utilising epoxy resin encapsulated electronics.

The AS 266/7 are equipped with a xenon beacon providing an audio visual warning signal, ideal for environments or a dwellings with elderly people.

The low profile AS 268 has an extreme low current consumption and can be mounted directly under most industry standard detectors. It can be activated by detectors remote output. Using a cover the sounder used stand-alone. The AS 269 on the other hand has fixing positions for addressable PCBs.

AS 263IS and AS 263HIS are intrinsic safe models providing 100 and 103/107 dB(A) through suitable safety barriers.


The sounders can provide different tones (see tones table in manual), switch selectable during installation.

A second or third tone, model dependant, is available if extra wires are installed in the sounder circuit.



Standard Features

- **Low current consumption**
- **High sound output**
- **Multiple tones selection**
- **12 - 24 V dc and 230 Vac**
- **Automatic synchronisation**
- **Suitable for multiple stage evacuation**
- **Red and white colour body**
- **IP 65 intrinsic safe and high output ; IP 66/67 intrinsic safe versions**
- **Low profile version**
- **Version with xenon flash**
- **Red or clear lens for beacon**

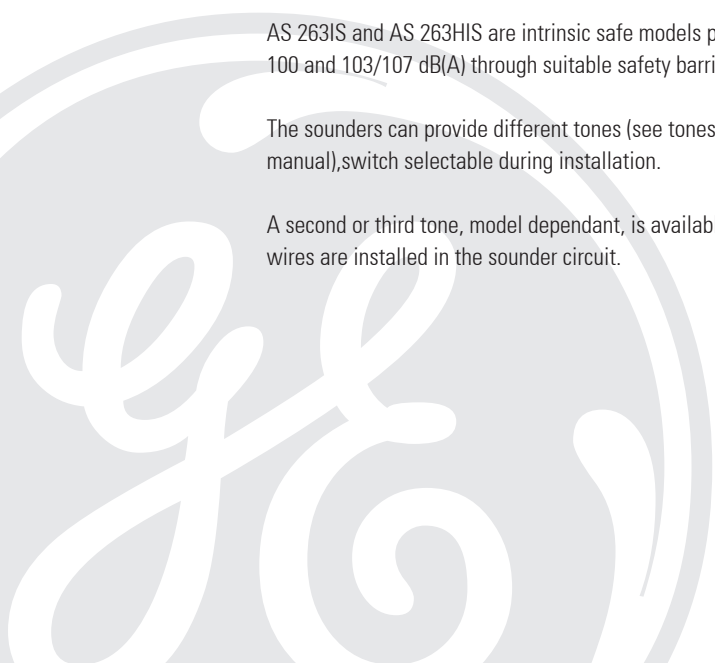

AS263

Sounder, 26 tones - shallow base

Specifications

Operation	Continuous
Supply voltage	10 - 28 V dc
Current consumption (see tone table in manual)	7 mA
Number of tones	26
Starting current	30 mA, 2 msec
Automatic synchronisation	Phased start
Line monitoring input	Polarised input
Housing	ABS plastic
Lens	-
Ingress protection	IP 65
Operating temperature	-25° to +80° C
Dimensions in mm (Ø x D)	
Shallow base	93 x 75
Deep base	93 x 105

Ordering Information

Part No.	Description
AS263	Sounder, 26 tones - shallow base
AS263IS	AS 263 intrinsically safe, weatherproof sounder
AS263WAT	AS 263, white with anti-tamper
AS263HIS	High output intrinsic safe sounder



GE Security

www.gesecurity.com

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.